





Actiflex Stadium

FAST AND EASY

- No special tools required
- Cost effective system

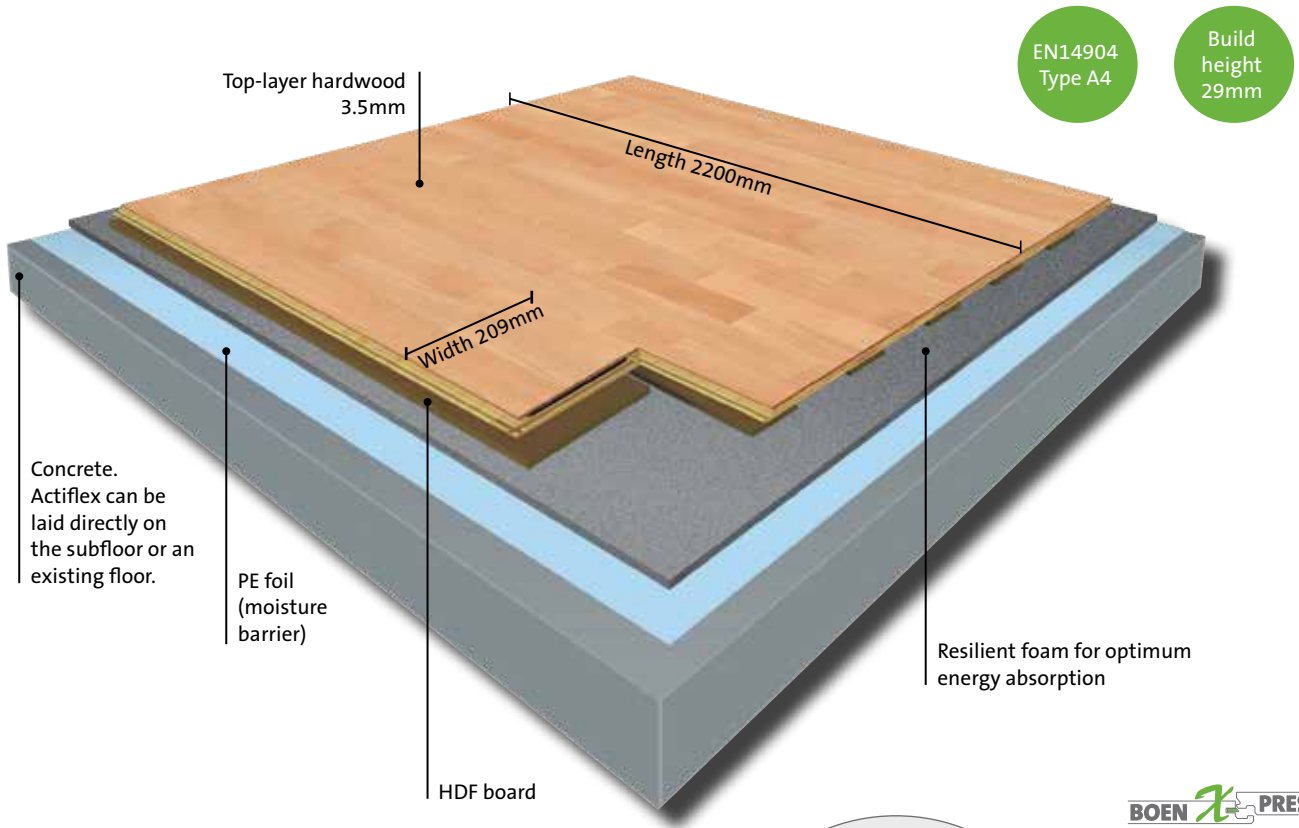

T79 Sports Finish

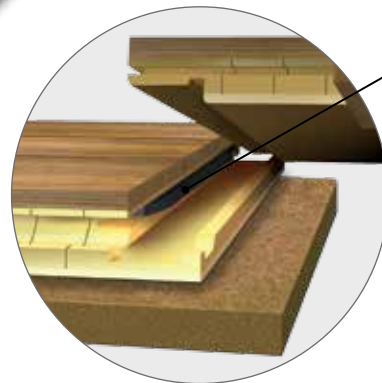

BOEN X-PRESS

BOEN X-press 5G locking mechanism gives a perfect result.

The BOEN X-press locking technology ensures a fast and secure installation.

Actiflex is an area elastic sports floor where the boards are installed on top of a shock absorption foam. The BOEN X-press locking technology ensures a fast and secure installation due to the use of a flexible profile in the short end joint of the board.

Can be installed on an even and self supporting subfloor or on top of an existing floor.

Area-elastic sports floor

USAGE: Sports Centres, gym, schools and private home.

Suitable for projects up to 300m².

| PERFORMANCE ACCORDING TO EN14904 | SHOCK ABSORPTION | DEFORMATION | FRICTION | BALL BOUNCE | ROLLING LOAD MIN. 1500N |
|----------------------------------|--------------------|----------------------|-----------|-------------|-------------------------|
| Actiflex | | | | | |
| STADIUM | Type 4: 61% | Type 4: 3.8mm | 86 | 95% | OK |




Actiflex Stadium

FAST AND EASY



3-strip



Clic

Wood species / Grading

Package overview

Ash Sport *

Beech Sport *

Pack Size: 4 boards =
1.84m² (19.2kg)

Pallet Size: 40 bundles =
73.6m² (766.80kg)

Maple Can. Sport *

Oak Sport *

* FSC™ Mix 70%

Actiflex Stadium Construction Details (from the top to the edge of concrete/subfloor)

Height

| | | |
|---|---|-------|
| Actiflex Stadium • Hardwood Top-Layer 3.5mm • Middle layer and bottom layer spruce. • HDF board glued to bottom | Actiflex size: 21 x 209 x 2200mm Actiflex Stadium Board 14 x 209 x 2200mm + HDF board 7mm | 21mm |
| Resilient foam | 8 x 1500 x 2000mm | 8mm |
| Perimeter Strips | 15 x 100 x 2500mm | ✓ |
| PE Foil (ordered separately) | Special requirement for new buildings: 2 layers of 0.2mm. It is not a moisture barrier, but gives to the floor an extra protection. | 0.4mm |
| Construction height | | 29mm |

Maintenance

We recommend starting a regular system of maintenance from day one. The amount of maintenance your floor requires will depend on how you use and treat it. For more information: boensport.com

The environment is at the core of all we do

BOEN hardwood flooring is a product of nature. As a procurer of timber BOEN has an important heritage to maintain. Constant involvement in resource preservation methods, participation in reforestation programmes and the development of alternatives to exotic species shows Boen's dedication towards the environment.

All timber purchased by BOEN is supplied from sources who belong to one or more forestry schemes or are working towards certification.

BOEN Bruk (Norway) FSC™ C051117, BOEN Parkett Deutschland (Germany) FSC™ C101713, BOEN Lietuva (Lithuania) FSC™ C021510, BOEN UK FSC™ C047288, BOEN US FSC™ C095158. www.fsc.org, FSC – The mark of responsible forestry.



www.realwood.eu



-part of the game!

boensport.com