




Arenaflex Stadium

- Flexbat

WHEN BUILDING HEIGHT MATTERS

- Ideal for renovation

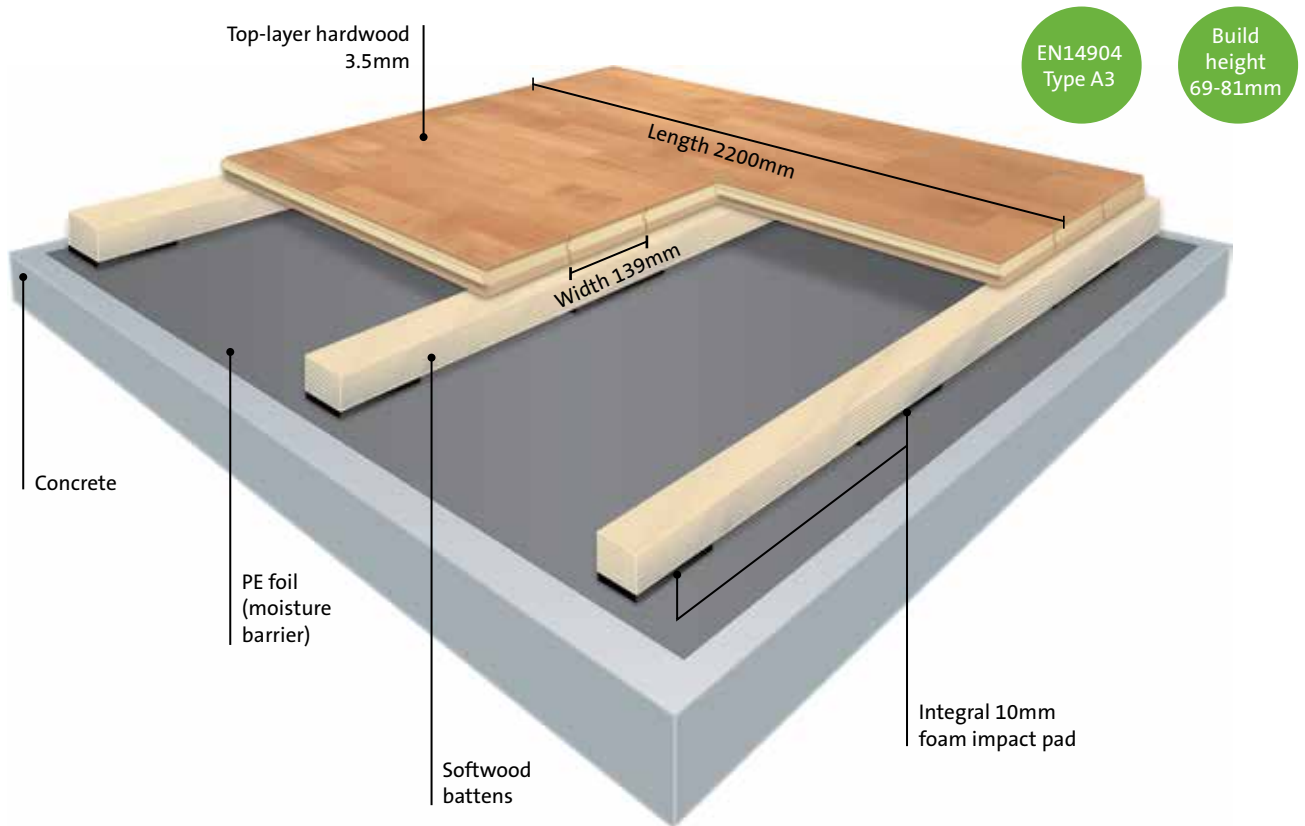

T79 Sports Finish
Squash Finish

Arenaflex Stadium - Flexbat is a resilient hardwood flooring system laid onto Flex Battens, and is ideally suited for use as activity flooring, sports halls, dance floors, recreation halls and gymnasiums.

An area elastic sports floor made up of impact - resistant softwood battens with an integral 10mm foam impact pad on the underside.

Can be installed on an uneven subfloor.

Area-elastic sports floor

USAGE: Sports and multipurpose centres.

Suitable for installation over underfloor heating systems.

PERFORMANCE ACCORDING TO EN14904	SHOCK ABSORPTION	DEFORMATION	FRICTION	BALL BOUNCE	ROLLING LOAD MIN. 1500N
----------------------------------	------------------	-------------	----------	-------------	-------------------------

Arenaflex - Stadium Flexbat					
STADIUM	Type 3: 43%	Type 3: 1.8mm	86	98%	OK




Arenaflex Stadium

- Flexbat

WHEN BUILDING HEIGHT MATTERS



2-strip



Tongue & groove

Wood species / Grading		Package overview
 Ash Sport *	 Beech Sport *	Pack Size: 6 Boards = 1.83m ² (21kg) Pallet Size: 42 packs = 76.86m ² (882kg) <hr/> Batten Centres at 367mm Batten Calculation = 2.88 lm/m ² of floor
 Maple Can. Sport *	 Oak Sport *	
* FSC™ Mix 70%		

Arenaflex Stadium Flexbat Construction Details (from the top to the edge of concrete/subfloor)		Height
Arenaflex Stadium Board • Hardwood Top-Layer 3.5mm • Middle layer and bottom layer spruce	Arenaflex board size: 23 x 139 x 2200mm	23 23
Batten, softwood Batten Centres at 367mm Batten Calculation = 2.88 lm/m ² of floor	Batten dimension: 46 x 45 x 1800mm Batten dimension: 58 x 45 x 1800mm	46 58
PE Foil (ordered separately)	Special requirement for new buildings: 2 layers of 0.2mm. It is not a moisture barrier, but gives to the floor an extra protection	0.4mm
Minimum Construction height		69 81

Maintenance

We recommend starting a regular system of maintenance from day one. The amount of maintenance your floor requires will depend on how you use and treat it. For more information: boensport.com

The environment is at the core of all we do

BOEN hardwood flooring is a product of nature. As a procurer of timber BOEN has an important heritage to maintain. Constant involvement in resource preservation methods, participation in reforestation programmes and the development of alternatives to exotic species shows Boen's dedication towards the environment.

All timber purchased by BOEN is supplied from sources who belong to one or more forestry schemes or are working towards certification.

BOEN Bruk (Norway) FSC™ C051117, BOEN Parkett Deutschland (Germany) FSC™ C101713, BOEN Lietuva (Lithuania) FSC™ C021510, BOEN UK FSC™ C047288, BOEN US FSC™ C095158. www.fsc.org, FSC – The mark of responsible forestry.



-part of the game!

boensport.com